

TESLA

TTGB18R32Wifi




FEATURES

4-Fan Speed: Low/Middle/High/Turbo, 3D Air Flow: Vertical/Horizontal Auto Swing, Turbo Mode, Anti-cold Air, I Feel, Low Temperature Heating/Cooling -15°C, Comfortable Cooling, Independent Dehumidification, Auto mode, Display On/OFF, smart airflow, Rapid Cooling and Rapid Heating, Intelligent defrost, Emergency Button, Anti-rust proo cabinet, Wide Voltage Range Start-up, Strong Cooling at 60°C, Leakage Detection, Auto-restart, Self-diagnosis, Louver Position Memory, Dual drainage, Washable filter, Hidden Display, Self-cleaning, Refrigerant Leak Detection, Sleep Mode, ECO function, Timer

Capacity		18000BTU	
Rated volt and frequency		V/Hz	
		220-240V~/50HZ	
Mode		Cooling	Heating
Rated capacity	W	5100 (1250-5910)	5100(1250-6070)
Power input	W	1580	1374
Current input	A	8.10	7.00
SEER-SCOP/ Energy Class	W/W	6,1/ A++	4,0/A+
Operating range	(°C)	0 - 53°C	-20°C - 30°C
Energy consumption (per year, based on standard test results)	kwh	293	1330
Dehumidifying	Kg/h	1.8	
Degree of protection (IN) / (OUT)	(IP)	IPX4/IPX4	
Class of electric protection (IN) / (OUT)	Class I / Class II	I/ I	
Max. input consumption	W	2340	
Max. current	A	13	
Compressor	Model	C-6RZ146H1DJ	
	Type	Rotary	
	Brand	SANYO	
Indoor	Fan motor	Model	210900495E
		Power input	W
		Capacity	uF
		Indoor Fan Speed RPM	r/min
	Indoor fan	Dia. / Length	mm
			φ98×702
	Indoor Air Circulation	m³/h	800
	Indoor Noise Level dB	dB(A)	27/35/40/43/53
	Net Dimension (LxWxH)	mm	910x294x206
	Packing Dimension (LxWxH)	mm	979x372x277
Net Weight/Gross Weight	Kg	okt.13	
Outdoor	Fan motor	Model	GZSDJ-33(DC)
		Power input	W
		Capacity	uF
		Outdoor Fan Speed RPM	r/min
	Outdoor fan	Length	mm
			φ439×154
	Outdoor Noise Level dB	dB(A)	43/47/52/55/65
	Net Dimension (LxWxH)	mm	835x605x360
	Packing Dimension (LxWxH)	mm	883x645x394
	Net Weight/Gross Weight	Kg	35/38
Refrigerant type/weight	g	R32/1000/675	
Max. Discharge/Max. Suction pressure	Mpa	3,7/1,2	
Refrigerant piping	Liquid side / Gas side	mm	6.35/12.7
	Max. refrigerant pipe length / Max. difference in level	m	25/10

TESLA TTGB12R32Wifi

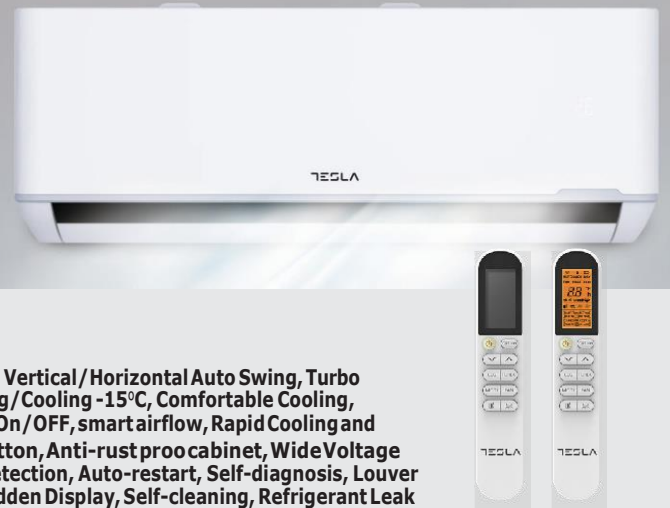

FEATURES

4-Fan Speed: Low/Middle/High/Turbo, 3D Air Flow: Vertical/Horizontal Auto Swing, Turbo Mode, Anti-cold Air, I Feel, Low Temperature Heating/Cooling -15°C, Comfortable Cooling, Independent Dehumidification, Auto mode, Display On/OFF, smart airflow, Rapid Cooling and Rapid Heating, Intelligent defrost, Emergency Button, Anti-rust proo cabinet, Wide Voltage Range Start-up, Strong Cooling at 60°C, Leakage Detection, Auto-restart, Self-diagnosis, Louver Position Memory, Dual drainage, Washable filter, Hidden Display, Self-cleaning, Refrigerant Leak Detection, Sleep Mode, ECO function, Timer, WIFI

Capacity		12000BTU		
Rated volt and frequency		V/Hz 220-240V~/50HZ		
Mode		Cooling	Heating	
Rated capacity		3400 (1000~3770)	3430 (1000~3810)	
Power input		1115	922	
Current input		5.80	4.70	
SEER-SCOP/ Energy Class		6,1/ A++	4,0/A+	
Operating range		(°C) -15°C - 53°C	-20°C - 30°C	
Energy consumption (per year, based on standard test results)		kwh 195	840	
Dehumidifying		Kg/h 1.2		
Degree of protection (IN) / (OUT)		(IP) IPX4/IPX4		
Class of electric protection (IN) / (OUT)		Class I / Class II I/ I		
Max. input consumption		W 1720		
Max. current		A 10		
Compressor		Model KSN98D32UEZ		
		Type Rotary		
		Brand GMCC		
Indoor	Fan motor	Model 1170030067G		
		Power input	W 20W output	
		Capacity	uF 2	
		Indoor Fan Speed RPM	r/min ≤1320	
	Indoor fan	Dia. / Length mm φ92×578		
	Indoor Air Circulation		m³/h 560	
	Indoor Noise Level dB		dB(A) 22/25/33/37/41/50	
	Net Dimension (LxWxH)		mm 790×275×192	
	Packing Dimension (LxWxH)		mm 860×345×265	
	Net Weight/Gross Weight		Kg 8/9,8	
Outdoor	Fan motor	Model 1170040162AB		
		Power input	W 33W output	
		Capacity	uF /	
		Outdoor Fan Speed RPM	r/min ≤1000	
	Outdoor fan	Length mm φ384×134		
	Outdoor Noise Level dB		dB(A) 29/33/39/46/50/60	
	Net Dimension (LxWxH)		mm 777×290×495	
	Packing Dimension (LxWxH)		mm 838×338×540	
	Net Weight/Gross Weight		Kg 23,3/25,2	
	Refrigerant type/weight		g R32/550g	
Max. Discharge/Max. Suction pressure		Mpa 3.7/1.2		
Refrigerant piping	Liquid side / Gas side		mm 6.35/9.52	
	Max. refrigerant pipe length / Max. difference in level		m 25/10	



TESLA

TAGB09R32Wifi




FEATURES

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Top plate/cover improved, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Backup Switch, Turbo Operation, Hydrophilic Aluminium Fin, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Air blade, Washable Filter, Anti-Cold-Air (Heat Pump Only), IFEEL

Capacity			9000BTU
Rated volt and frequency		V/Hz	220-240V~/50HZ
Mode			Cooling Heating
Rated capacity		W	2600(600-3200) 2900(600-3500)
Power input		W	750(100-1100) 855(100-1100)
Current input		A	3.6(0.6-5.0) 4.1(0.6-5.0)
SEER-SCOP/ Energy Class		W/W	6,42/A++ 4,11/A+
Operating range		(°C)	16~49°C -15~30°C
Energy consumption (per year, based on standard test results)		kwh	142 817
Dehumidifying		Kg/h	0.6
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/II
Max. input consumption		W	1700
Max. current		A	8.0
Compressor		Model	GSD088RKNA6JV6B
		Type	DC
		Brand	Highly
Indoor	Fan motor	Model	YYK18-4B
		Power input	W
		Capacity	uF
		Indoor Fan Speed RPM	r/min
	Indoor fan	Dia. / Length	mm
	Indoor Air Circulation	m³/h	1130/1015/900
	Indoor Noise Level dB	dB(A)	φ97.8x558
	Indoor Noise Level dB	dB(A)	560
Net Dimension (LxWxH)	mm	54/44/39/35/31/26	
Packing Dimension (LxWxH)	mm	750X285X200	
Net Weight/Gross Weight	Kg	820X347X277	
Outdoor	Fan motor	Model	D-24-8
		Power input	W
		Capacity	uF
		Outdoor Fan Speed RPM	r/min
	Outdoor fan	Length	mm
	Outdoor Noise Level dB	dB(A)	820
	Net Dimension (LxWxH)	mm	390
	Packing Dimension (LxWxH)	mm	61
	Net Weight/Gross Weight	Kg	730X545X285
	Refrigerant type/weight	g	850X620X370
Max. Discharge/Max. Suction pressure	Mpa	25/28	
Refrigerant piping	Liquid side / Gas side	mm	R32/530
	Max. refrigerant pipe length/ Max. difference in level	m	4.3/2.5
			φ6,35 /φ9,52
			20/10

TESLA TAGB18R32



FEATURES

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Top plate/cover improved, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Backup Switch, Turbo Operation, Hydrophilic Aluminium Fin, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Air blade, Washable Filter, Anti-Cold-Air (Heat Pump Only), I FEEL

Capacity			18000BTU	
Rated volt and frequency		V/Hz	220-240V~/50HZ	
Mode			Cooling Heating	
Rated capacity		W	5000(1500-5200) 5280(130-5400)	
Power input		W	1500(130-1550) 1450(220-1450)	
Current input		A	6.6(0.9-6.8) 6.4(1.4-6.5)	
SEER-SCOP/ Energy Class		W/W	6,44/A++ 4,08A+	
Operating range		(°C)	16~49°C -15~30°C	
Energy consumption (per year, based on standard test results)		kwh	272 1236	
Dehumidifying		Kg/h	1.6	
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4	
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I	
Max. input consumption		W	1500	
Max. current		A	6.6	
Compressor		Model	KSN102D32UFZA	
		Type	DC	
		Brand	GMCC	
Indoor	Fan motor	Model	YYK25-4D	
		Power input	W	66
		Capacity	uF	3
		Indoor Fan Speed RPM	r/min	1080/965/850
	Indoor fan	Dia. / Length	mm	φ107.9/661
	Indoor Air Circulation		m³/h	850
	Indoor Noise Level dB		dB(A)	57/46/42/39/35/25
	Net Dimension (L×W×H)		mm	900×310×225
	Packing Dimension (L×W×H)		mm	970×382×302
	Net Weight/Gross Weight		Kg	11/13
Outdoor	Fan motor	Model	D-40-8	
		Power input	W	62
		Capacity	uF	/
		Outdoor Fan Speed RPM	r/min	900
	Outdoor fan	Length	mm	421
	Outdoor Noise Level dB		dB(A)	62
	Net Dimension (L×W×H)		mm	800×545×315
	Packing Dimension (L×W×H)		mm	920×620×400
	Net Weight/Gross Weight		Kg	30.5/33.5
	Refrigerant type/weight		g	R32/970
Max. Discharge/Max. Suction pressure		Mpa	4.3/2.5	
Refrigerant piping	Liquid side / Gas side	mm	φ6,35 / φ12,7	
	Max. refrigerant pipe length / Max. difference in level	m	20/10	